

A

B

10642

C

D

E

4

LTR	REVISION	REV BY
A	G97-00645	A.V.
B	G98-00301	A.V.

NOTES:

1. APPLY KRYTOX GREASE P/N 095000 TO BODY/CAP NUT THREADED AREA. APPLY POLYLUBE P/N 095005 TO ADJUSTING SCREW 106815 APPLY LUBRIMATIC P/N 095004 TO SPRING BUTTON 100031.

2. Ø 1.375 HOLE REQUIRED FOR PANEL MOUNT.

3. BODY P/N DEPENDS ON PORTING STYLE CHOSEN.

TORQUE SPEC'S

ITEM	PART NO.	DESCRIPTION	LBF-FT
3	103922	CAP	60
8	102330	SEAT RETAINER	25

CORE BILL OF MATERIALS

ITEM	PART NO.	DESCRIPTION	QTY.
1	110291	PRY OUT PLUG ASSY W LOGO	1
2	106815	ADJUSTING SCREW	1
3	103922	P/M CAP	1
4	100031	SPRING BUTTON	1
5	SEE OPTIONS	RANGE SPRING	1
6	107538	SPRING STABILIZER	1
7	SEE OPTIONS	DIAPHRAGM ASSEMBLY	1
8	102330	SEAT RETAINER	1
9	103688	TEFZEL SEAT	1
10	101161	SEAT HOLDER	1
11	101167	TEFLON LOW ER FLAT SEAL	1
12	SEE NOTE	REGULATOR BODY, 316L S.S.	1
13	100020	POPPET	1
14	106310	POPPET SPRING	1
15	109803-1	BLUE KNOB	1
16	074100	KNOB NUT	1
17	103596	SINTERED FILTER INLET KIT	1
18	107683	P/M NUT	1
19	100286	NYLON WASHER	1
20	108142	INSTALLATION INSTRUCTIONS	1

OUTPUT OPTIONS

OUTPUT	DIAPHRAGM ASSEMBLY				RANGE SPRING				
PSI	102380	100040	100042	100044	100890	100891	100892	100893	100894
0-10	X				X				
0-25		X			X				
0-50		X				X			
0-100		X					X		
0-250			X					X	
0-500				X					X

GO Regulator, Inc.

305 South Acacia Street
San Dimas, CA 91773 USA

NAME

PR-1 PANEL MOUNT
SALES DRAWING

SIZE

A

DWG. NO.

106424

REV.


B

1

2

3

4

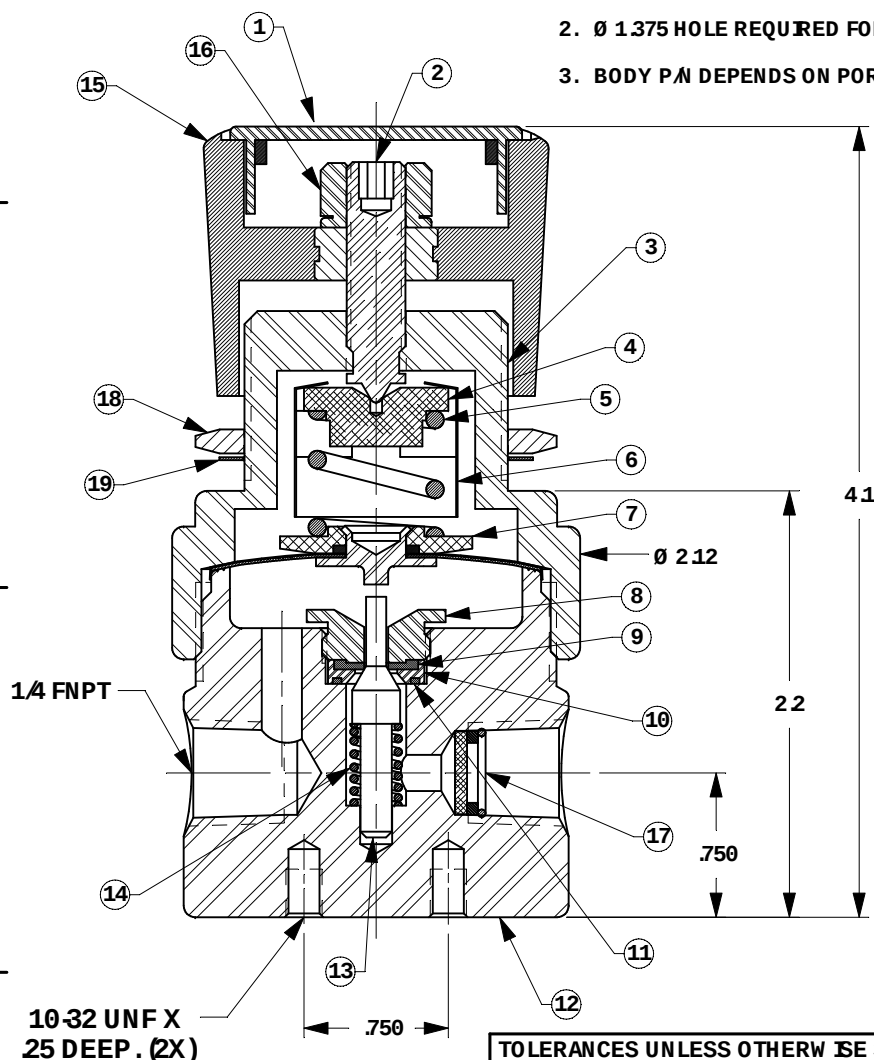

TOLERANCES UNLESS OTHERWISE SPECIFIED

DECIMAL: X ± .050
XX ± .020
XXX ± .005

ANGULAR: ± 30'

SURFACE FINISH: 32/

THREADS CLASS 2A OR 2B

BREAK SHARP EDGES .015 X 45° MAX

THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND MAY NOT BE DISCLOSED, TRANSFERRED OR REPRODUCED FOR MANUFACTURING PURPOSES, OR ANY OTHER PURPOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF GO REGULATOR, INC.