


Kämmer® SmallFlow™ - 385000 / 385000 SP

Low and Micro Flow Valves

FCD KMENTB5000-03 02/15

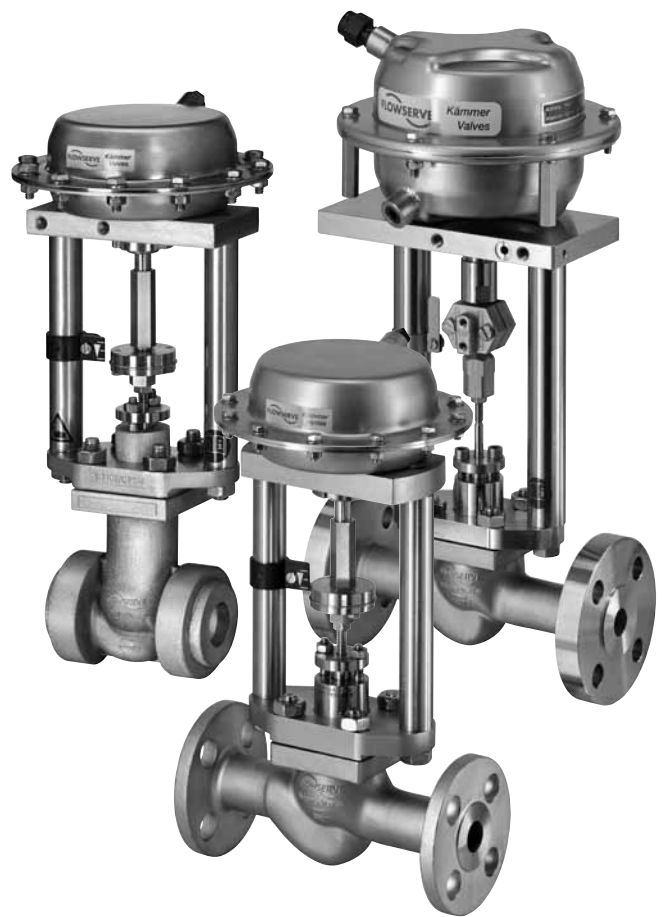

C_v VALUES

				Plug	1.4571	Alloy 6	Alloy 6	Alloy 6	1.4571	Multihole	Hast C	IN/NI/MO	
				Seat	1.4571	1.4571	1.4122	Alloy 6	PTFE	Alloy 6	Hast C	IN/NI/MO	
Kvs / Cv values													
Kvs	Trim#	Cv	Trim#	seat dia.									
0,000054	2T	0,000063	.08T	2 / 0.08			x						
0,000068	2S	0,000079	.08S	2 / 0.08			x						
0,000084	2R	0,000098	.08R	2 / 0.08			x						
0,0001	2Q	0,00012	.08Q	2 / 0.08			x						
0,00013	2P	0,00015	.08P	2 / 0.08			x						
0,00016	2O	0,00019	.08O	2 / 0.08			x						
0,0002	2N	0,00023	.08N	2 / 0.08			x						
0,00025	2M	0,00029	.08M	2 / 0.08			x						
0,00031	2L	0,00036	.08L	2 / 0.08			x						
0,00039	2K	0,00045	.08K	2 / 0.08			x						
0,00048	2J	0,00056	.08J	2 / 0.08			x						
0,00064	2I	0,00075	.08I	2 / 0.08			x						
0,00084	2H	0,00098	.08H	2 / 0.08			x						
0,0011	2G	0,0013	.08G	2 / 0.08			x						
0,0015	2F	0,0017	.08F	2 / 0.08			x						
0,0019	2E	0,0022	.08E	2 / 0.08			x						
0,0025	2D	0,0029	.08D	2 / 0.08			x						
0,0033	2C	0,0038	.08C	2 / 0.08			x						
0,0046	2B	0,0054	.08B	2 / 0.08			x						
0,0068	2A	0,0079	.08A	2 / 0.08			x						
0,011	3H	0,013	.12H	3 / 0.12		x		x			x	x	
0,017	3G	0,02	.12G	3 / 0.12		x		x			x	x	
0,025	3F	0,029	.12F	3 / 0.12		x		x			x	x	
0,04	3E	0,047	.12E	3 / 0.12		x		x			x	x	
0,063	3D	0,074	.12D	3 / 0.12		x		x			x	x	
0,1	3C	0,12	.12C	3 / 0.12	x	x		x	x		x	x	
0,16	3B	0,19	.12B	3 / 0.12	x	x		x	x		x	x	
0,25	3A	0,29	.12A	3 / 0.12	x	x		x	x		x	x	
0,4	4,5B	0,47	.18B	4,5 / 0.18	x	x		x	x		x	x	
0,63	4,5A	0,74	.18A	4,5 / 0.18	x	x		x	x		x	x	
1	7B	1,2	.28B	7 / 0.28	x	x		x	x		x	x	
1,6	7A	1,9	.28A	7 / 0.28	x	x		x	x	x	x	x	
2,5	10	2,9	.40	10 / 0.40	x	x		x	x	x	x	x	
4	12	4,7	.48	12 / 0.48	x	x		x			x	x	
Stroke													
mm / in					10 / 0.394								
Plug Characteristic													
Equal percentage					x								
Linear					x								
On-Off					x								

BODY DATA

	25 1"	15 ½"	25 1"	15 ½"	20 ¾"	25 1"	15 ½"	20 ¾"	25 1"
	Cast SP	Cast		Forged			Barstock		
Body Style									
Globe	x	x		x			x		
Angle				x			x		
Pressure Classes									
PN 10 - 40	x	x		x			x		
PN 63 - 160	x	x		x			x		
PN 250				x			x		
PN 400				x			x		
CL 150	x	x		x			x		
CL 300	x	x		x			x		
CL 600	x	x		x			x		
CL 900 - 1500				x			x		
CL 2500				x			x		
End Connection Type									
Screwed ends G 1/2" / 1/2" NPT		x		x			x		
Flanged EN 1092-1	x (102mm)	x							
Flanged ANSI B16.5	x (102mm)	x							
Flangeless EN 1092-1 / ANSI B16.5	x (102mm)								
Weld ends		x		x			x		
APV flanges			x						
Screwed ends DIN 11851			x						
Others on request		x							
Bonnet Type									
Standard	x	x							
Bellows		x							
Normalizing fins		x							
Low temperature extension (300mm / 600mm)		x							
Approvals									
PED 97/23	x	x							
ATEX 94/9	x	x							


MATERIALS

	25 1"	15 ½"	25 1"	15 ½"	20 ¾"	25 1"	15 ½"	20 ¾"	25 1"
	Cast SP	Cast		Forged			Barstock		
Body Material									
1.4408 / CF3M	Stainless Steel	x	x						
1.4404 / 316L	Stainless Steel				x			x	
1.0619 / WCB	Carbon Steel		x						
1.0460 / A105	Carbon Steel				x			x	
Hastelloy 276								x	
Inconel 600								x	
Nickel								x	
Monel 400								x	
Other materials on request								x	
Bellows Material									
1.4571 PN 10-63			x		x			x	
1.4571 PN 100			x		x			x	
1.4571 PN 160			x		x			x	
1.4571 PN 250					x			x	
HC 276 PN 10-63			x		x			x	
Packing									
PTFE	x	x							
Graphite SAS	x	x							
PTFE V-Ring spring loaded	x	x							
SureGuard HP	ISO 15848-1 Class B (max PN100)	x	x					x	
ISO-C	ISO 15848-1 Class C (max PN 160)	x	x					x	
Body Gaskets									
PTFE	x	x							


DIMENSIONS

	25	15	20	25
	1“	½“	¾“	1“
A [mm/in]				
Screwed ends G ½” / ½” NPT		120 / 4.7		
Flanged EN 1092-1 (PN 10-40)	102 / 4.0	130 / 5.1	150 / 5.9	160 / 6.3
Flanged EN 1092-1 (PN 63-160)	102 / 4.0	210 / 8.3	230 / 9.1	230 / 9.1
Flanged EN 1092-1 (PN 250)		230 / 9.1	260 / 10.2	260 / 10.2
Flanged EN 1092-1 (PN 400)		230 / 9.1	260 / 10.2	260 / 10.2
Flanged ANSI B16.5 (Class 150)	102 / 4.0	178 / 7.0	184 / 7.25	184 / 7.25
Flanged ANSI B16.5 (Class 300)	102 / 4.0	190 / 7.5	197 / 7.75	197 / 7.75
Flanged ANSI B16.5 (Class 600)	102 / 4.0	203 / 8.0	206 / 8.1	210 / 8.25
Flanged ANSI B16.5 (Class 900-1500)		216 / 8.5	229 / 9.35	254 / 10.0
Flanged ANSI B16.5 (Class 2500)		264 / 10.4	273 / 10.75	308 / 12.15
Flangeless PN 10-160 Class 150-600	102 / 4.0			
Weld ends	120 / 4.7			
APV Flansche				128 / 5.0
F1 [mm/in]				
Standard	94 / 3.7	54 / 2.1		
Bellows seal		198 / 7.8		
Standard, extended		94 / 3.7		
Low temperature extension (300mm)		368 / 14.5		
Low temperature extension (600mm)		668 / 26.3		
F2 [mm/in]				
Standard	151 / 6.0	54 / 2.1		
Bellows seal		198 / 7.8		
Standard, extended		94 / 3.7		
Low temperature extension (300mm)		368 / 14.5		
Low temperature extension (600mm)		668 / 26.3		


DIMENSIONS

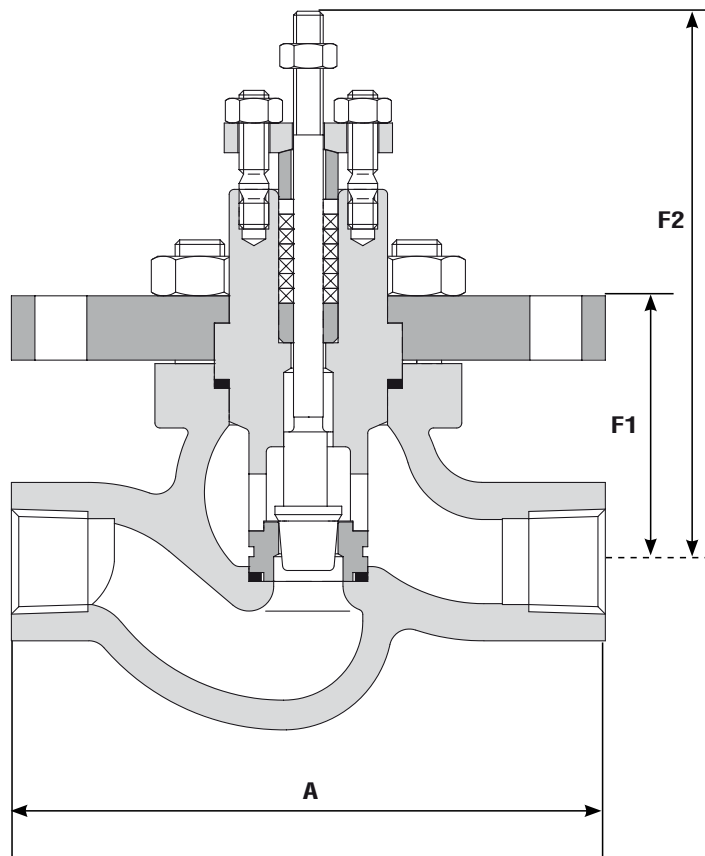


SmallFlow - 385000

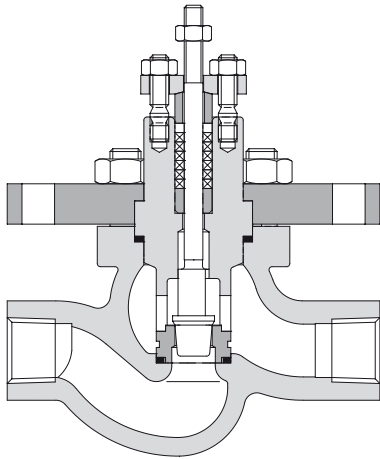


Standard Design

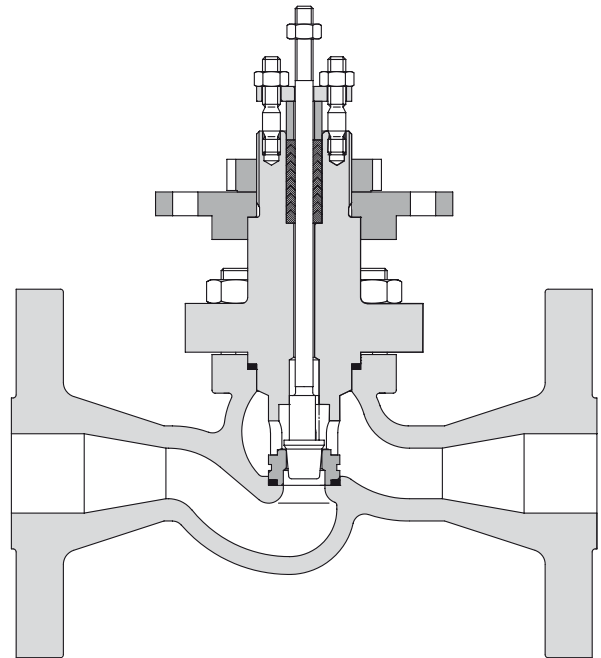


Standard Extension

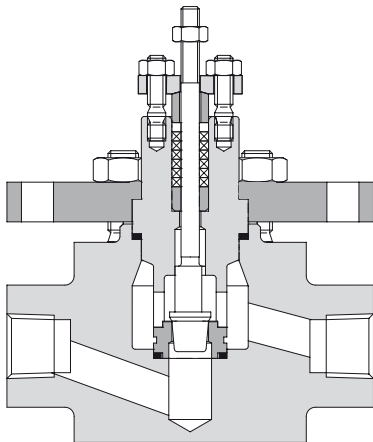


Special Material

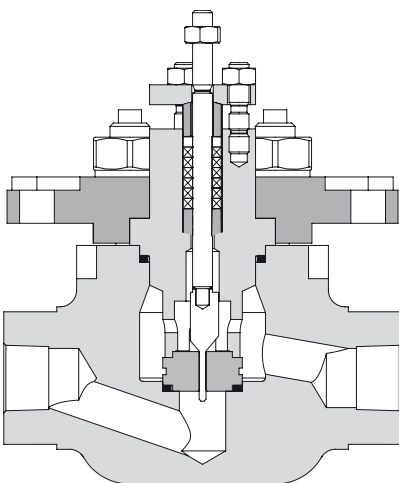

Forged Material

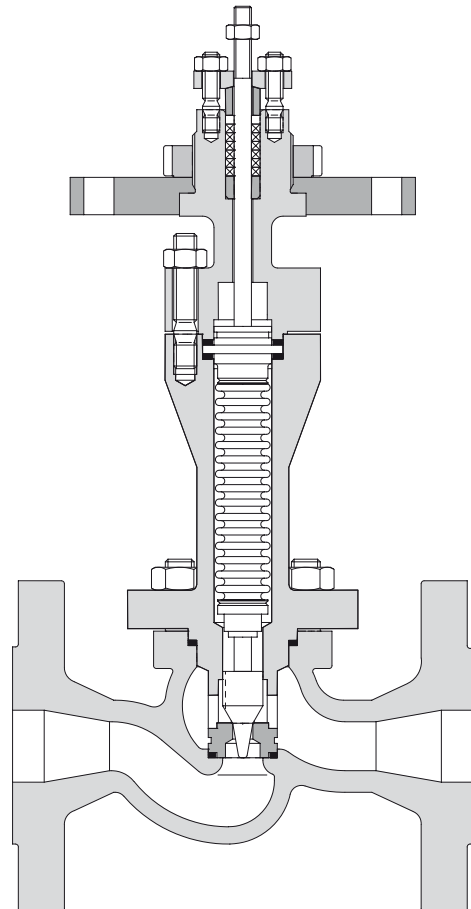


Bellows Seal

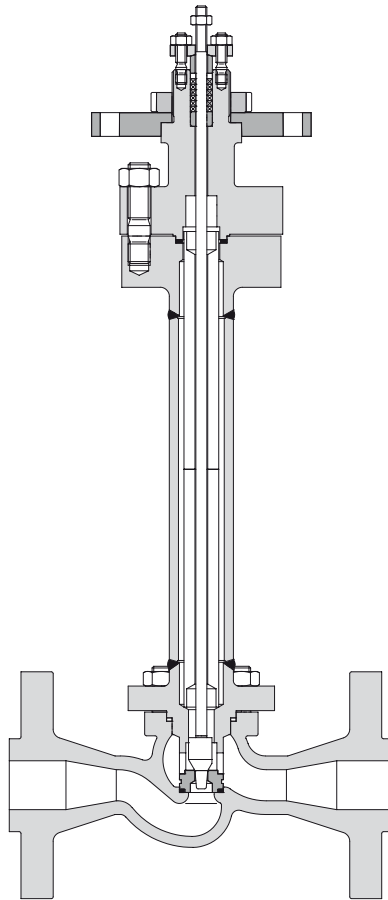


Cryogenic Extension

SmallFlow - 385000 SP

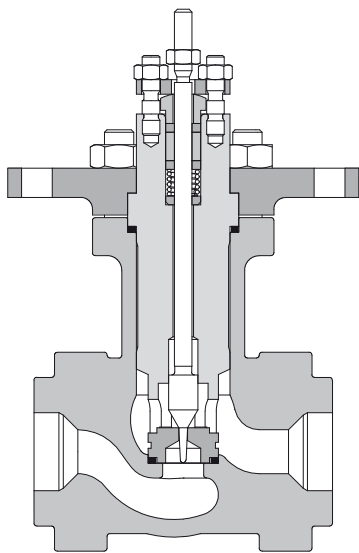

Without Flange

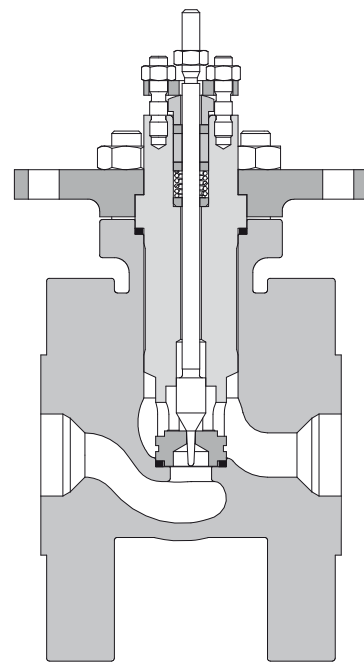

With Flange

**Germany****Flowserve Essen GmbH**

Schederhofstr. 71

45145 Essen

Deutschland

Tel.: +49 (0)201 8919 5

Fax: +49 (0)201 8919 662

USA**Flowserve Flow Control**

Quick Response Center

5114 Railroad Street

Deer Park, Texas 77536

USA

Phone: +1 281 479 9500

Fax: +1 281 479 8511

Singapore**Flowserve Pte Ltd**

12 Tuas Avenue 20

Singapore, 638824

Singapore

Tel.: +65 6879 8989

Fax: +65 6862 4940

Your contact:

All data subject to change without notice

©11.2008 Flowserve Corporation. Flowserve and Kämmer are registered trademarks of Flowserve Corporation