


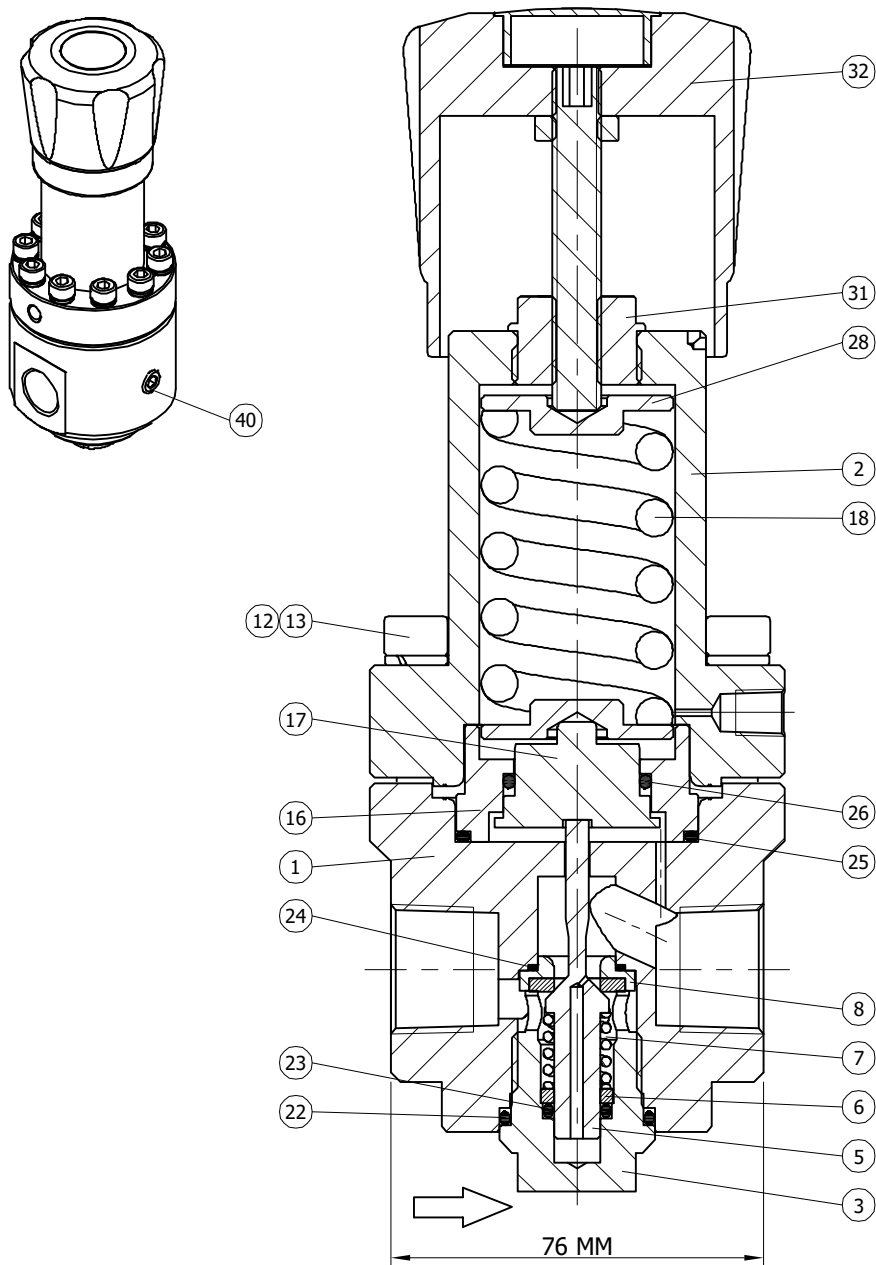

49				
48				
47				
46				
45				
44				
43				
42				
41				
40	1	GP-98020-SS	BLINDPLUG, 1/4 NPT	SS 316L
39				
38				
37				
36				
35				
34				
33				
32	1	GP-98040-AL70	KNOB ASSEMBLY	ALUMINUM
31	1	MP-20025-SS431	SPRINGHOUSING SCREW	SS 431
30				
29				
28	2	MP-20090-SS	SPRINGGUIDE	SS 316L
27				
X 26	1	SLO-NSS-120	O-RING	NBR
X 25	1	SLO-NHS-132	O-RING	NBR
X 24	1	SLO-NHS-016	O-RING	NBR
X 23	1	SLO-NHS-110	O-RING	NBR
X 22	1	SLO-NHS-121	O-RING	NBR
21				
20				
19				
18	1	CS-39-064-215-SS302	SETSPRING	SS 302
17	1	MP-20117-SS	PISTON	SS 316L
16	1	MP-20115-SS	PISTONPLATE	SS 316L
15				
14				
13	10	FST-0912-M08X035	SOCKET HEAD CAP SCREW	A4-80
12	10	FST-7980-M08	RING	A4
11				
10				
9				
X 8	1	MP-20160-SSK	SEAT	SS 316L / PCTFE
7	1	CS-14-021-020-SS316	VALVE SPRING	SS 316
6	1	MP-20050-SS	VALVE RING	SS 316L
X 5	1	MP-20040-SS	VALVE	SS 316L
4				
3	1	MP-20030-SS	BODYPLUG	SS 316L
2	1	MP-20020-SS	SPRINGHOUSING	SS 316L
1	1	MP-20005-SS	BODY	SS 316L
Parts in spare parts kit	Pos	Qty	Partnumber	Description
				Material
			Dutch Regulators BV	GRT20S-420N50-SSKN
			Luzernestraat 8	typenumber
			2153 GN Nieuw-Vennep	
			The Netherlands	
			www.dutchregulators.com	
			DRAWN: MDW	PLT-200418 00
			DATE: 12-04-2022	drawingnumber revision

Springloaded pressure regulator

Line connections ANSI B1.20.1 3/4" NPT

Inletpressure	0-420 BAR	Seatediameter	9,5 MM
Adjustable	0-50 BAR	Valvesize	DN20
Design pressure inlet	0-420 BAR	Temperature	- 35 / 60 °C
Design pressure outlet	0-420 BAR		

Gaugeport connection 1x 1/4" npt