
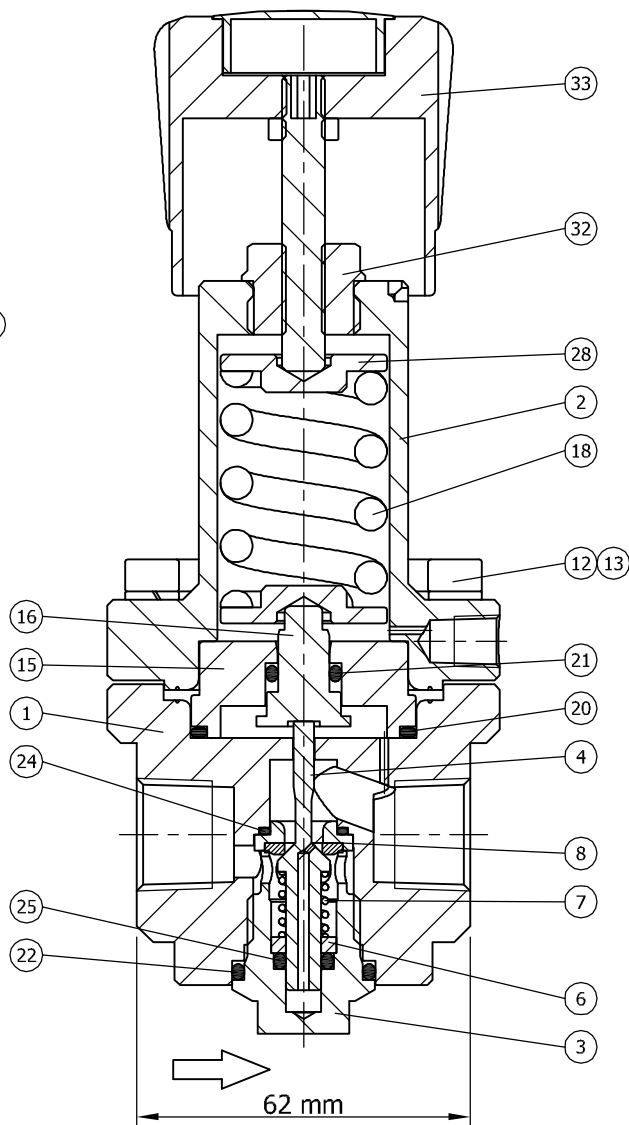


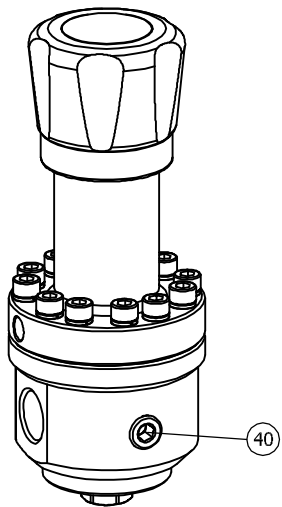

Springloaded pressure regulator

Line connections ANSI B1.20.1 1/2" NPT

Inletpressure	0-420 BAR	Seatediameter	7 MM
Adjustable	0-280 BAR	Valvesize	DN15
Design pressure inlet	0-420 BAR	Temperature	- 35 / 60 °C
Design pressure outlet	0-420 BAR		

Gauge connection: 1x 1/4" NPT (outlet)

Parts in spare parts kit

49				
48				
47				
46				
45				
44				
43				
42				
41				
40	1	GP-98020-SS	BLINDPLUG, 1/4" NPT	SS 316L
39				
38				
37				
36				
35				
34				
33	1	GP-98030-AL55	KNOB ASSEMBLY	ALUMINUM
32	1	MP-15025-SS431	SPRINGHOUSING SCREW	SS 431
31				
30				
29				
28	2	MP-15090-SS	SPRINGGUIDE	SS 316L
27				
26				
X 25	1	SLO-NHS-108	O-RING	NBR
X 24	1	SLO-NHS-014	O-RING	NBR
23				
X 22	1	SLO-NHS-118	O-RING	NBR
X 21	1	SLO-NHS-110	O-RING	NBR
X 20	1	SLO-NHS-127	O-RING	NBR
19				
18	1	CS-31-044-158-CR50V4	SETSPRING	CR50V4
17				
16	1	MP-15136-SS	PISTON	SS 316L
15	1	MP-15135-SS	PISTONPLATE	SS 316L
14				
13	12	FST-0912-M06X025	SOCKET HEAD CAP SCREW	A4-80
12	12	FST-7980-M06	RING	A4
11				
10				
9				
X 8	1	MP-15060-SSK	SEAT	SS 316L - PCTFE
7	1	CS-10-017-019-SS316	VALVE SPRING	SS 316
6	1	MP-15050-SS	VALVE RING	SS 316L
5				
X 4	1	MP-15040-SS	VALVE	SS 316L
3	1	MP-15030-SS	BODYPLUG	SS 316L
2	1	MP-15021-SS	SPRINGHOUSING	SS 316L
1	1	MP-15006-SS	BODY	SS 316L
Pos	Qty	Partnumber	Description	Material

Dutch Regulators BV
Luzernestraat 8
2153 GN Nieuw-Vennep
The Netherlands
www.dutchregulators.com

GRT15S-420N280-SSKN
typenumber

DRAWN: MDW
DATE: 20-08-2013

PLT-150035 00
drawingnumber revision